

Fletching

Logique Glazed Wall Mosaics



9999471724 WHITE



9999471727 MIST



9999471727 TAUPE



9999471726 LIGHT GRAY



999471725 DARK GRAY




999471723 BLACK

Installation

Thickness	Grout Joint Recommendation	Sheet Size	Backing	Shade Variation
5/16" (8mm)	1/8"	285mm x 300mm	Mesh	V1

Test Results

Product Performance	ISO #	Results
Water Absorption	ISO 10545-3	<18%
Stain Resistance	ISO 10545-14	Class 5
Household Chemical Resistance	ISO 10545-13	Resistant
Frost Resistant	ISO 10545-12	No

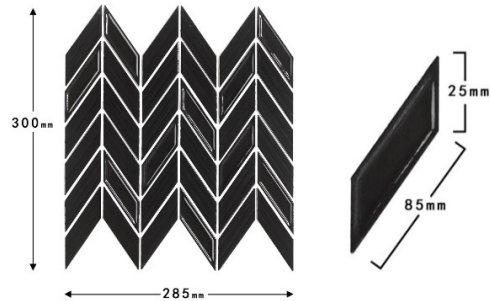

Applications

Applications	Interior			Exterior	
	Residential	Light Commercial	Commercial	Residential	Commercial
Floors / Patios					
Walls / Backsplashes	✓	✓	✓		
Countertops					
Pool Lining					

Notes

Since there are variations in all fired ceramic products, the tile and trim supplied for your particular installation may vary from these images. Final selection should be made from actual tiles and trim and not from tiles and trim imagery. Manufactured in accordance with ANSI A137.1 standards.

